





FLOOD LIGHT SERIES

- 50W
- 100W
- 150W
- 200W

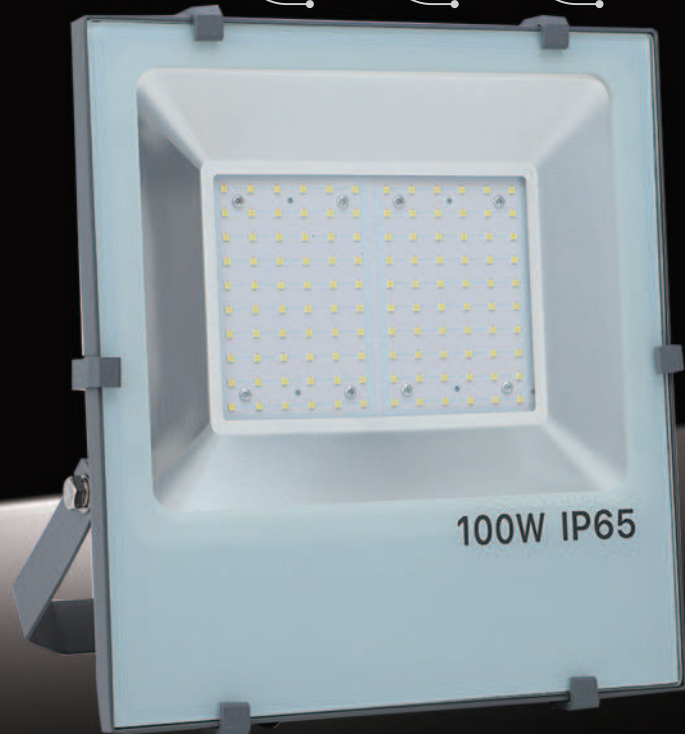

FLOOD LIGHT

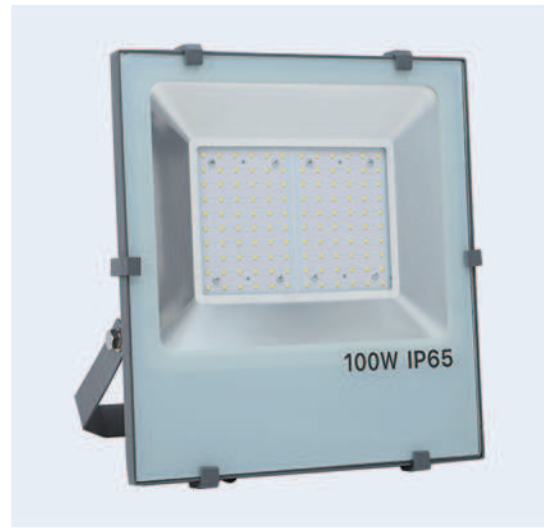

FEATURE 特点

- Die-cast Aluminum
- High thermal conductivity
- CHANGFANG LED
- Yimingyuan Driver, Efficiency >90%
- 3 years warranty
- Long life time 50,000 hours
- Impact test IK08
- Waterproof IP66
- Electrical: 85V-265V, 50/60HZ
- CRI>70
- Surge protection 4KV

APPLICATION SCENARIOS 应用场景

Park, Square, Sports ground, Stage



SAFETY FEATURES 安全特点



PRODUCT PARAMETERS 产品参数

| Model | Watt (W) | Voltage (V) | Lumen (lm) | CRI | Power factor | Beam Angle | IP | LED | Driver | LxWxH (mm) |
|---------------|----------|-------------|------------|-----|--------------|------------|------|-----------|------------|------------|
| YMY-0908G-050 | 50 | 85-265 | 6000 | >70 | 0.95 | 120° | IP66 | CHANGFANG | YIMINGYUAN | 230*250*40 |
| YMY-0908G-100 | 100 | 85-265 | 12000 | >70 | 0.95 | 120° | IP66 | CHANGFANG | YIMINGYUAN | 265*285*40 |
| YMY-0908G-150 | 150 | 85-265 | 18000 | >70 | 0.95 | 120° | IP66 | CHANGFANG | YIMINGYUAN | 303*313*40 |
| YMY-0908G-200 | 200 | 85-265 | 24000 | >70 | 0.95 | 120° | IP66 | CHANGFANG | YIMINGYUAN | 361*380*43 |

