



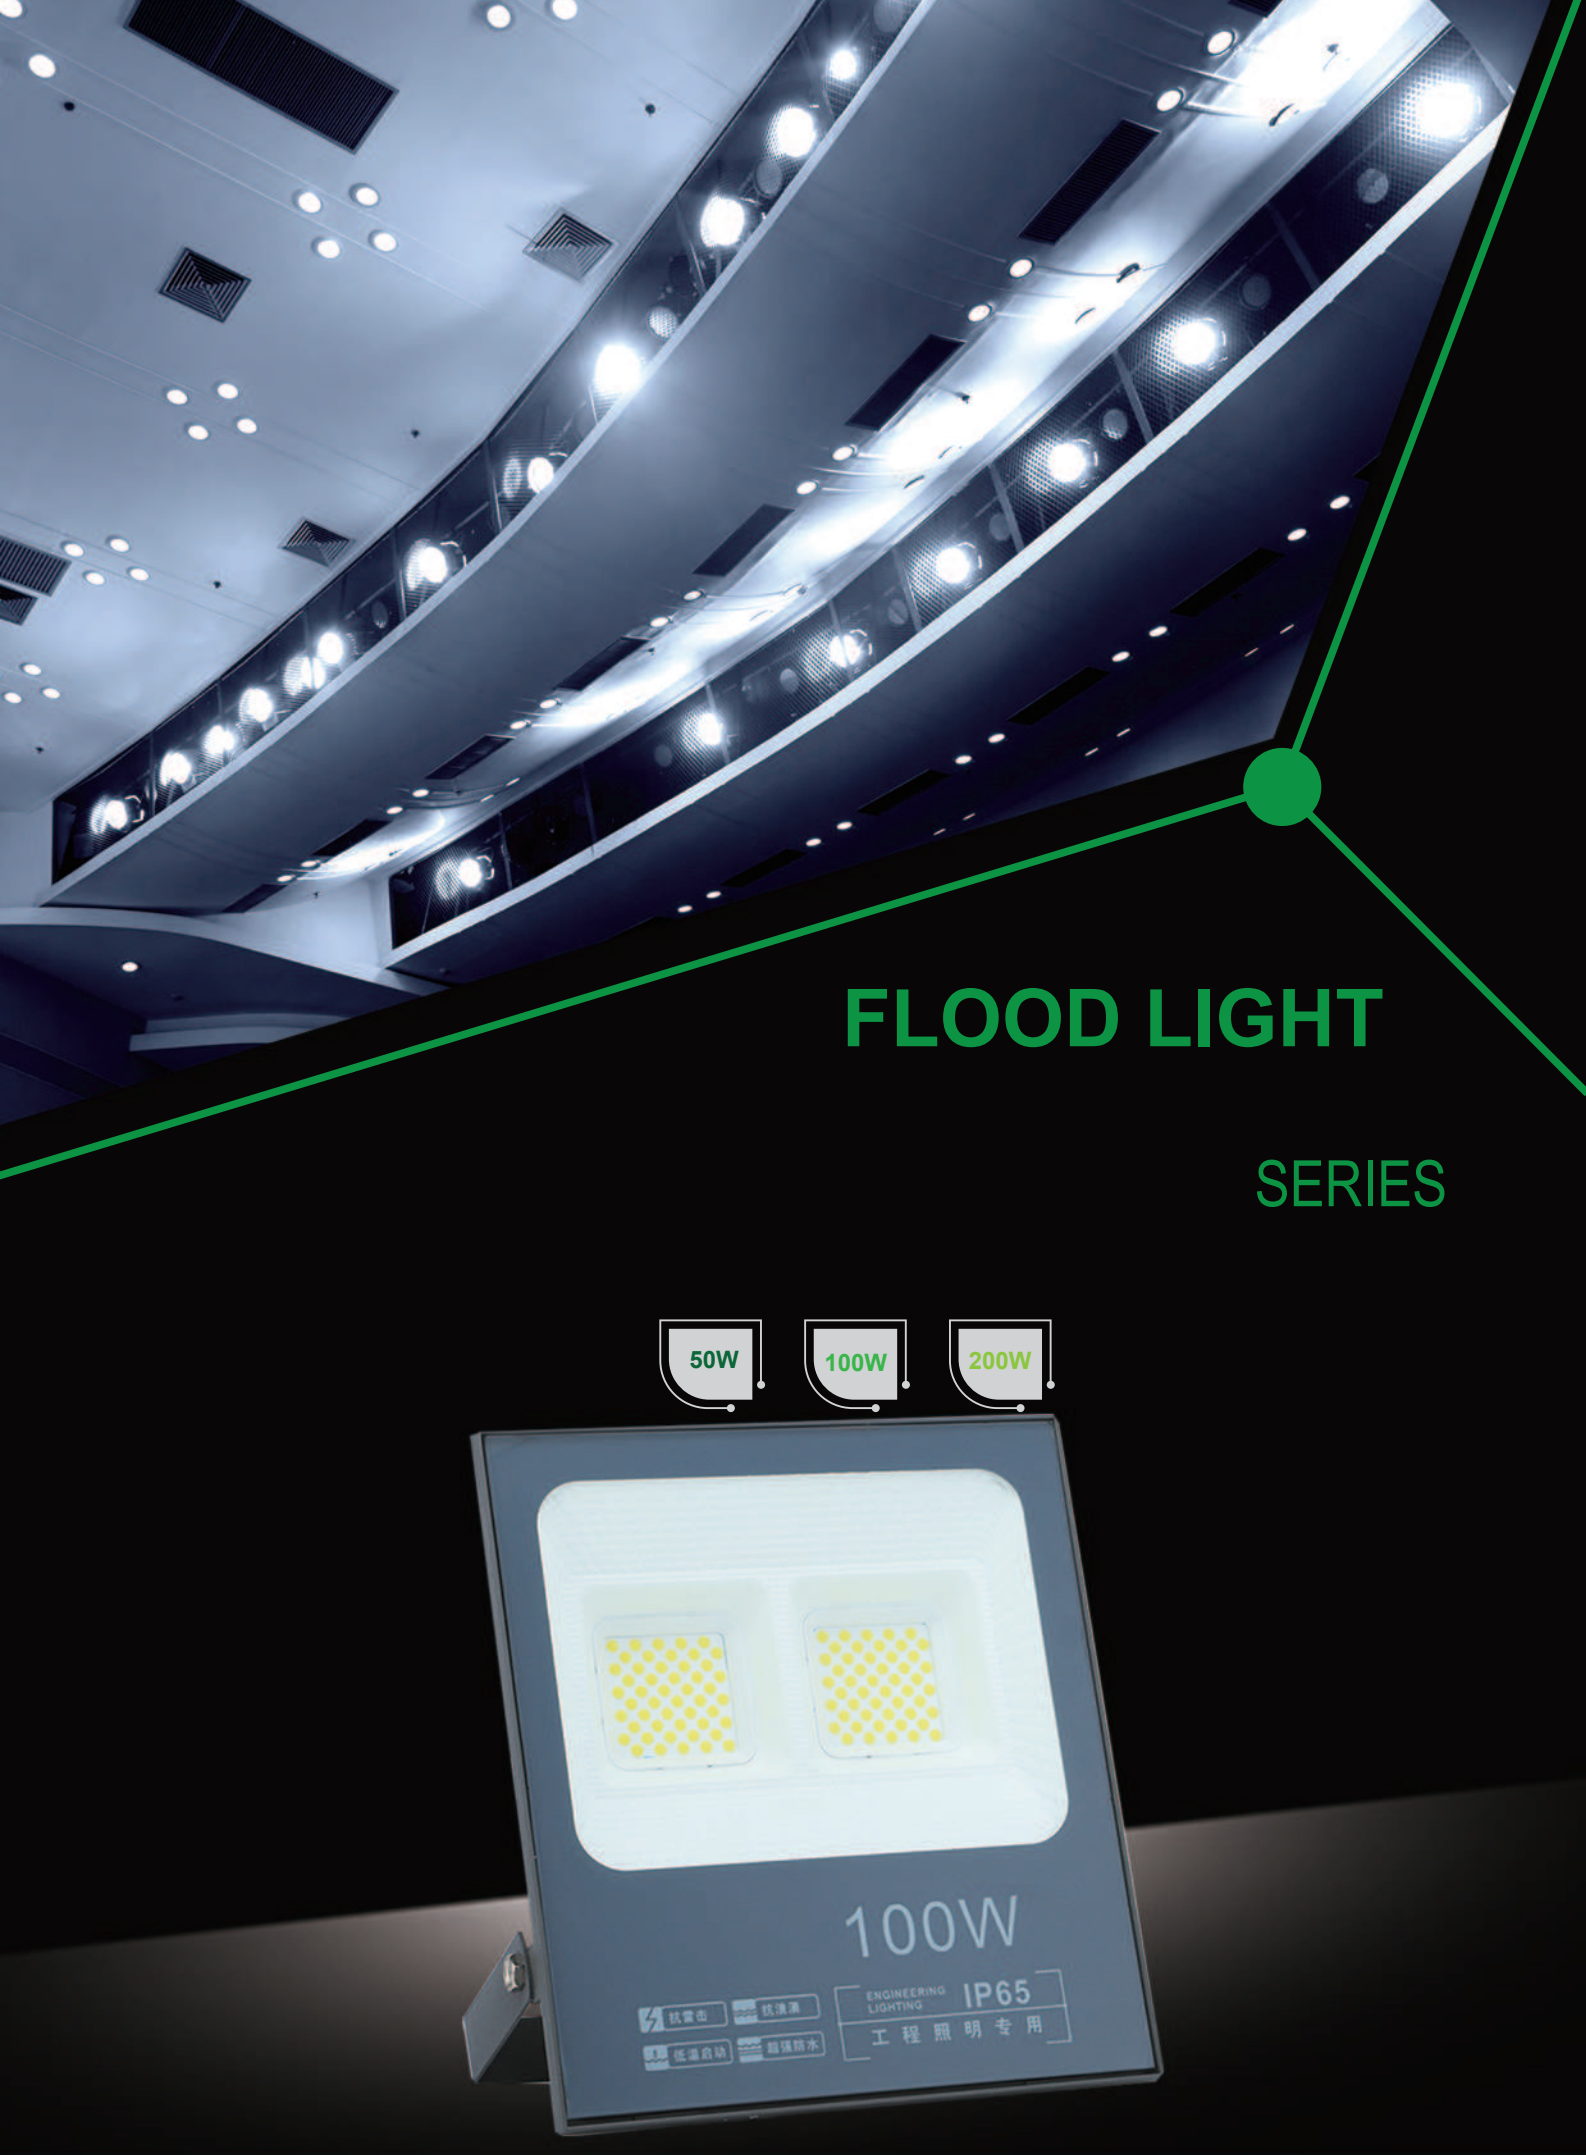

FLOOD LIGHT SERIES

50W 100W 200W

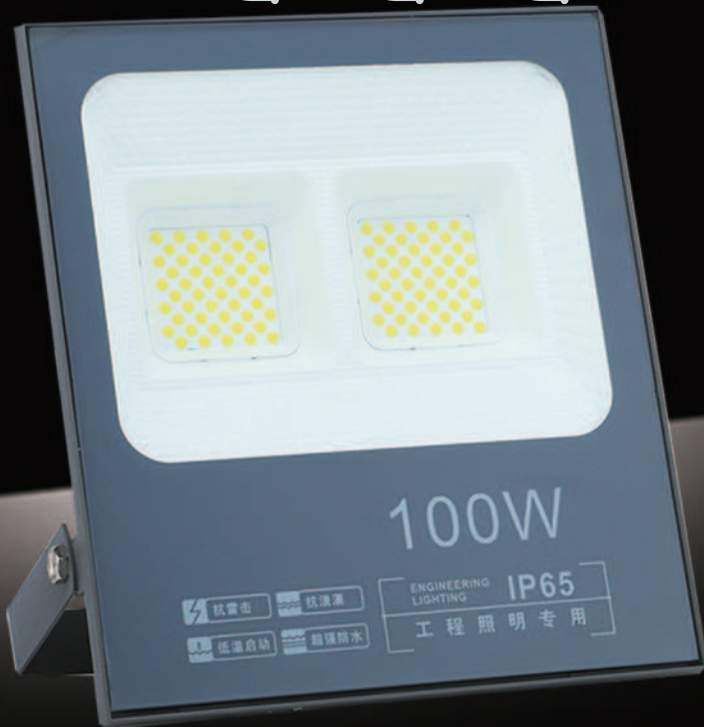


FLOOD LIGHT

FEATURE 特点

Die-cast Aluminum
High thermal conductivity
HC SEMITEK LED
Yimingyuan Driver, Efficiency >90%
3 years warranty
Long life time 50,000 hours
Impact test IK08
Waterproof IP66
Electrical: 85V-265V, 50/60HZ
CRI>70
Surge protection 4KV

APPLICATION SCENARIOS 应用场景

Garden, School, Square, Yard, RESidential community, Road

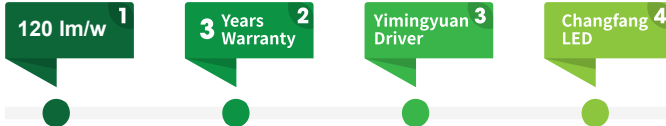

SAFETY FEATURES 安全特点



PRODUCT PARAMETERS 产品参数

Model	Watt (W)	Voltage (V)	Lumen (lm)	CRI	Power factor	Beam Angle	IP	LED	Driver	LxWxH (mm)
YMY-0912M-050	50	85-265	6000	>70	0.95	120°	IP66	HC SEMITEK	YIMINGYUAN	239*209*50
YMY-0912M-100	100	85-265	12000	>70	0.95	120°	IP66	HC SEMITEK	YIMINGYUAN	285*255*60
YMY-0912M-200	200	85-265	24000	>70	0.95	120°	IP66	HC SEMITEK	YIMINGYUAN	346*309*65

